
Great Lakes Collection

Yellow Birch Micro Bevel Flooring

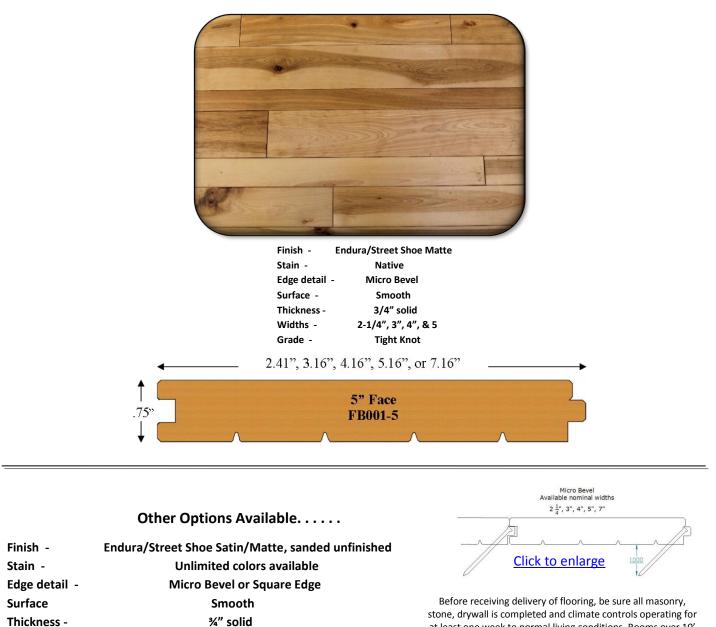

stone, drywall is completed and climate controls operating for at least one week to normal living conditions. Rooms over 10' in width begin installation in center of room and use spline to reverse direction. Recommended 2" long approved flooring serrated nail or staple placed 6" to 8" apart. Nail and glue is best installation method. Leave ½" to ¾" expansion gap along all walls and hide gap with base and shoe.

Click for full installation details

www.kwaterskibros.com

2-1/4", 3", 4", 5", 7" (Click for pattern detail)

Rustic, Tight Knot, Select

Widths -

Grades -

Nation's Largest Selection of Creative Wood Products