



Hewn Log Siding Collection

5" Hewn Log – SE005

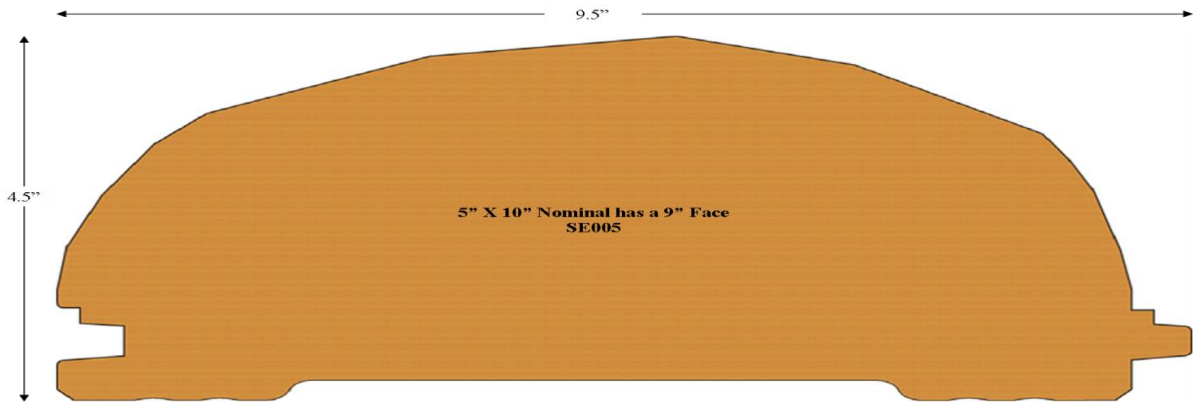

Available Specifications

- Species - White Pine, Cedar*, Redwood*
- Colors - Log & Siding, SRD, Semi-Transparent, Rubbol Solid, Custom colors also available
- Edge detail - Double Step Tongue and Groove – Hidden Fastener
- Surface - Hewn and Sanded Face
- Thickness - 5" Nominal
- Widths - 10" Nominal ([Click for pattern details](#))
- Grades (specie dependent) - Tight Knot, Select, Clear Vertical Grain
- * Non-resinous - no pitch bleed

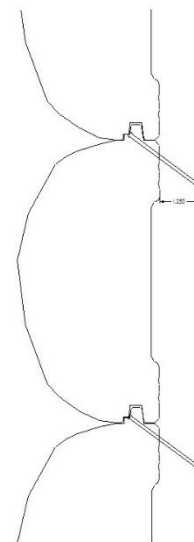

Installation Guide

Recommended 1 1/2" penetration of stainless steel siding screw into wood substrate (heating and wall studs) behind siding. Horizontal and diagonal installation: nail into each wall stud. Vertical installation requires additional blocking every 24" between wall studs. Use 2" trim screws provided there is no installation requires additional blocking between studs every 32".

[Click to enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products