


Headwaters Siding Collection


Half Log T&G – SH004

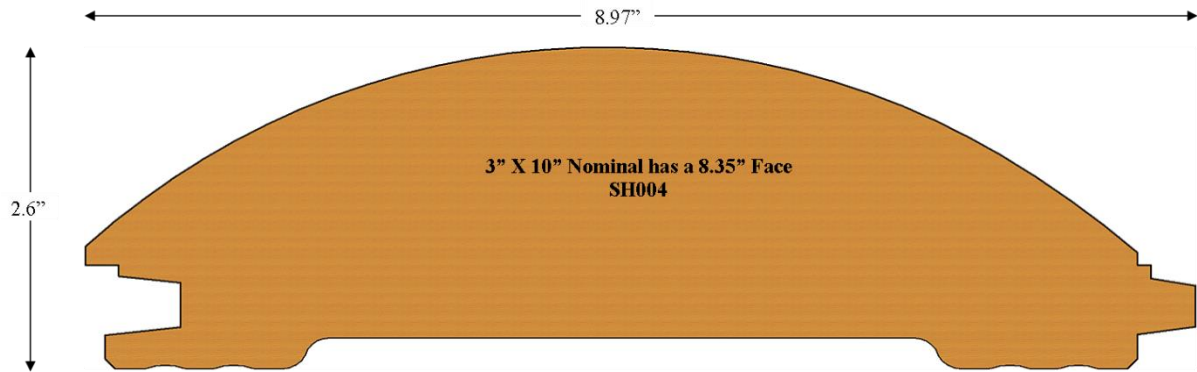

Available Specifications

Species -	White Pine, Cedar*, Redwood*
Colors -	<u>Log & Siding</u> , <u>SRD</u> , <u>Semi-Transparent</u> , <u>Rubbol Solid</u> , Custom colors also available
Edge detail -	Shiplap - Face Nailed
Surface -	Sanded Face
Thickness -	3" Nominal
Widths -	10" Nominal (Click for pattern details)
Grades (specie dependent) -	Tight Knot, Select, Clear Vertical Grain
	* Non-resinous - no pitch bleed

Installation Guide

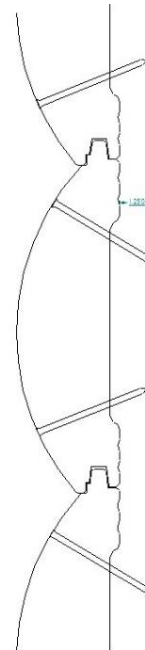

Recommended $\frac{1}{4}$ " penetration of stainless steel siding screw or nail into wood substrate (sheeting and wall studs behind siding. Horizontal and diagonal installation, fasten into each wall stud. Vertical installation requires additional blocking every 24" between wall studs. Use 3" trim screw provided there is no foam board behind siding. Vertical installation requires additional blocking between studs every 32".

[Click to enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products