


# Contemporary Siding Collection


## Micro Bevel V-Joint T&G – PV015

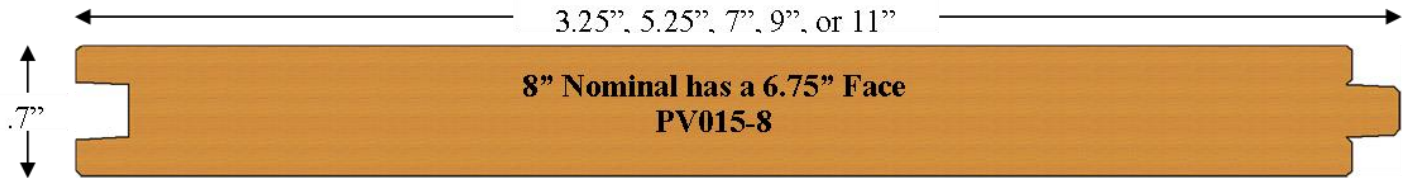

### Available Specifications

- Species - White Pine, Redwood\*, Ipe\*, Cedar\*
- Colors - Log & Siding, SRD, Semi-Transparent, Rubbol Solid, Custom colors also available
- Edge detail - Tongue and Groove – Hidden Fastener
- Surface - Wirebrushed or Sanded Face
- Thickness - 1" Nominal
- Widths - 4", 6", 8", 10", or 12" Nominal ([Click for pattern details](#))
- Grades (specie dependent) - Select or Clear Vertical Grain
- \* Non-resinous - no pitch bleed

### Installation Guide

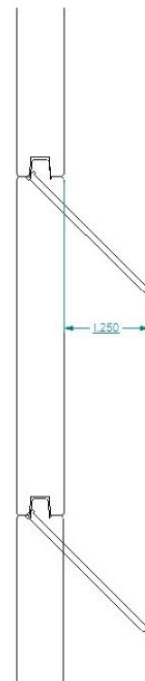

Recommended 1  $\frac{1}{4}$ " penetration of stainless steel siding nail into wood substrate (sheeting and wall studs) behind siding. For horizontal and diagonal installation nail into each wall stud. Vertical installation requires additional blocking every 24" between wall studs. Use 8d provided there is no foam board behind siding. Vertical installation requires additional blocking between studs every 32".

[Click to enlarge](#)

[www.kwaterskibros.com](http://www.kwaterskibros.com)

*Nation's Largest Selection of Creative Wood Products*