



Contemporary Siding Collection

Narrowline Channel – SM008

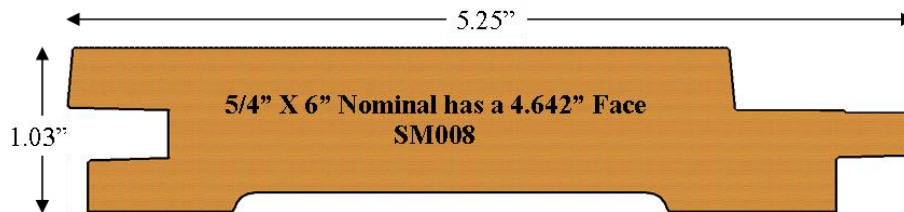

Available Specifications

- Species - Alaskan Pine*, White Pine, Redwood*, Ipe*, or Cedar*
- Colors - Log & Siding, SRD, Semi-Transparent, Rubbol Solid, Custom colors also available
- Edge detail - Tongue and Groove – Hidden Fastener
- Surface - Wirebrushed or Sanded Face
- Thickness - 5/4" Nominal
- Widths - 4", 6", 8", 10", or 12" Nominal ([Click for pattern details](#))
- Grades (specie dependent) - Tight Knot, Select, or Clear Vertical Grain
- * Non-resinous - no pitch bleed

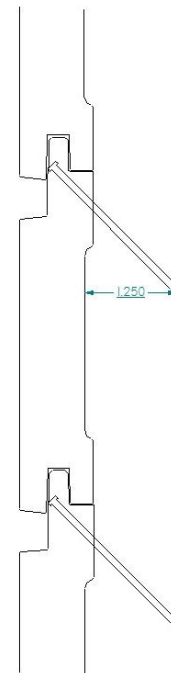

Installation Guide

Recommended $1\frac{1}{4}$ " penetration of stainless steel siding nail into wood substrate (sheeting and wall studs) behind siding. For horizontal and diagonal installation nail into each wall stud. Vertical installation requires additional blocking every 24" between wall studs. Use 8d provided there is no foam board behind siding.

[Click to enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products