



Knotty Bevel Siding Collection

Thick Butt Straight Bevel – SB007

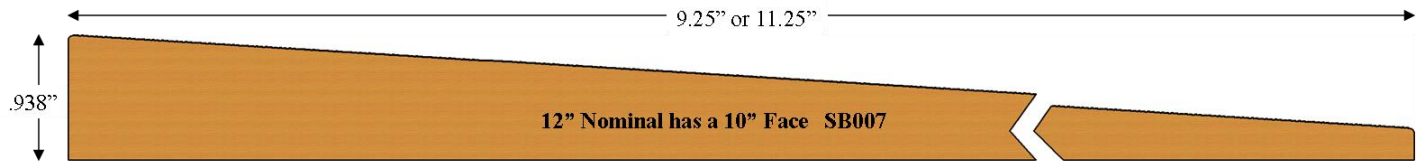

Available Specifications

Species -	Cedar*
Colors -	<u>Log & Siding</u> , <u>SRD</u> , <u>Semi-Transparent</u> , <u>Rubbol Solid</u> , Custom colors also available
Edge detail -	Lap – Face Nailed
Surface -	Rough Face
Thickness -	1" Nominal
Widths -	10" or 12" Nominal (Click for pattern details)
Grades -	Tight Knot
	* Non-resinous - no pitch bleed

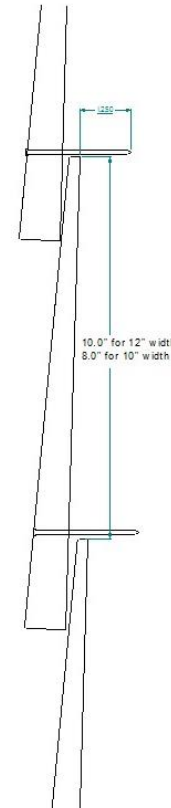

Installation Guide

Recommended $\frac{1}{4}$ " penetration of stainless steel siding nail into wood substrate (sheeting and wall studs) behind siding. For horizontal installation, nail into each wall stud. Use 8d nail provided there is no foam board behind siding.

[Click to enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products