



Paneling Roanoke Beaded PB012 & PB013

Pine/Cedar PB012

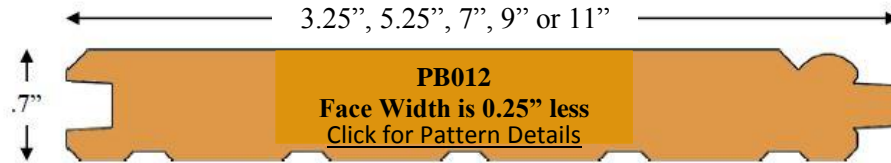

Hardwood PB013

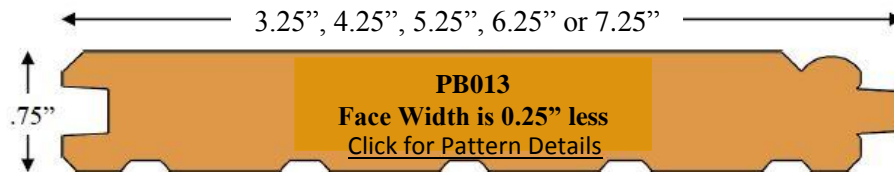


Collection

Grade/Specie

- Classic –** Select Cedar, Select Douglas Fir, Select Lyptus, Select Mahogany, Select Red Oak, Select White Oak, Select Pine and Select Walnut
- Mellow Country –** Select Alder, Select Aspen, Select Cedar, TK Cedar, Arctic Hickory, Select Maple, Select Red Oak, Select White Oak, Select Pine, TK Lodgepole Pine, TK White Pine, Select Poplar and TK Walnut

Available Specifications

- Edge Detail –** .177" Bevel & .227" Radius
- Surface –** Triple Sanded to 180 Grit
- Finish –** Prefinished in Endura Oil or Endura Aqua
- Stain –** Unlimited Colors Available

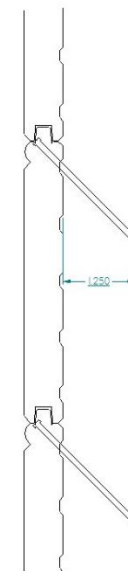

Installation Guide

Recommended $1 \frac{1}{4}$ " penetration of stainless steel siding nail into wood substrate (sheeting and wall studs) behind siding. For horizontal and diagonal installation nail into each wall stud. Vertical installation requires additional blocking every 24" between wall studs. Use 8d provided there is no foam board behind siding.

[Click to Enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products