


Headwaters Siding Collection

Half Log - Log on Log SH002




Specie -	Cedar
Finish -	Sikkens Log & Siding
Color -	078 Natural
Edge detail-	Shiplap – Face Nailed
Surface -	Sanded Smooth Face
Thickness -	2" Nominal
Widths -	8" Nominal
Grade	Tight Knot

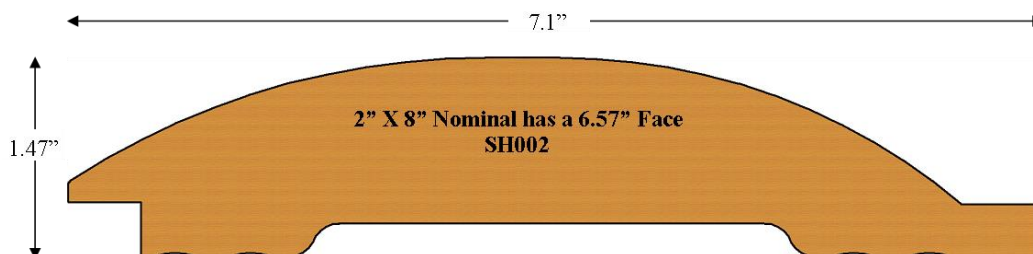

Other Options Available.

Species -	Alaskan Pine*, White Pine, Cedar*, Redwood*
Finish -	Prefinish Available - Sikkens Wood Finish Specialist
Colors -	<u>Log & Siding</u> , <u>SRD</u> , <u>WB SRD</u> , <u>Semi-Transparent</u> , <u>Rubbol Solid</u> , Custom colors also available
Edge detail -	Shiplap – Face Nailed
Surface -	Sanded Smooth Face
Thickness -	2" Nominal
Widths -	8" Nominal (Click for pattern details)
Grades (specie dependent) -	Tight Knot, Select, Clear Vertical Grain
	* Non-resinous - no pitch bleed

Installation Guide

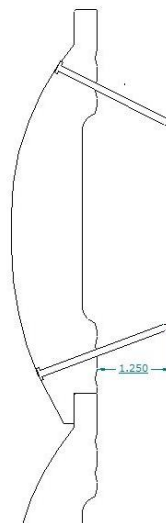

Recommended $1\frac{1}{4}$ " penetration of stainless steel siding screw or nail into wood substrate (sheeting and wall studs) behind siding. Horizontal installation, nail into each wall stud. Use $\frac{1}{4}$ " trim screw or $2\frac{1}{2}$ " stainless steel nail provided there is no foam board behind siding.

[Click to enlarge](#)

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products