


Decking

Designer Grooved Cedar




Finish - Prefinish Available – Sikkens Wood Finish Specialist
 Stain - Natural
 Surface - Sanded Smooth
 Size – 2 x 6
 Grade - Cedar - Tight Knot

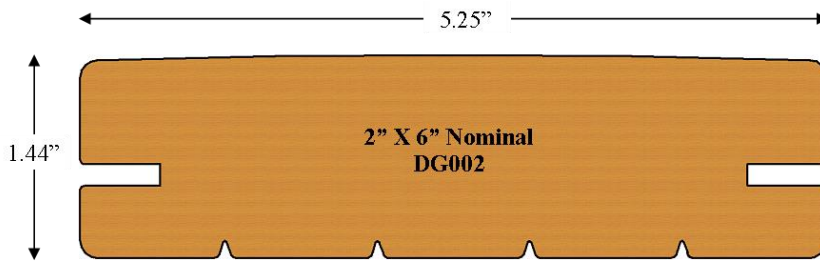

Other Options Available

Finish – Prefinish Available – Sikkens Wood Finish Specialist
 Stain – SRD, Semi – Transparent, Rubbol Solid, DEK
 Surface - Textured Surfaces Available
 Optional Sizes: 5/4" x 6", 2" x 6"
 Grades - Cedar - Tight Knot, Select, Clear Vertical Grain

Installation Guide

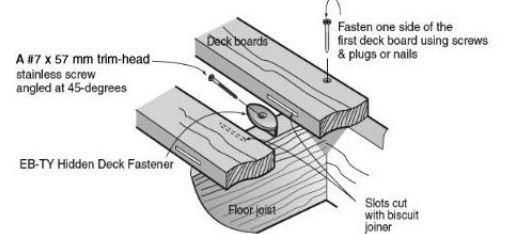

[Click to view instructions](#)

Finishing and Maintenance Recommendations

Product	Preparation Required	Recommended Finish	Application	Average Length of Maintenance Cycle	Required Maintenance Steps
Designer Cedar Tight Knot, Select or Vertical Grain	None, it comes dried and sanded ready for prefinishing	Sikkens SRD Oil Finish	1 coat on all sides and ends	1 to 3 years depending on traffic and exposure to the sun	Prior to refinishing, mix cleaning solution of 2 oz. TSP, 1 quart bleach, 3 quarts of water. Using a pump garden sprayer, spray solution on a wetted deck, let sit 15 minutes, and then power wash. Allow to dry 2 days, then apply one coat of Sikkens SRD Finish
Designer Cedar Vertical Grain	None, it comes dried and sanded	With Vertical Grain grade you have the option to not apply a finish and allow it to weather to a soft silver gray	N/A	Annually	Mix cleaning solution of 2 oz. TSP, 1 quart bleach, 3 quarts of water. Using a pump garden sprayer, spray solution on a wetted deck, let sit 15 minutes, and then power wash.

www.kwaterskibros.com

Nation's Largest Selection of Creative Wood Products