


# Great Lakes Collection

## Hickory Micro Bevel Flooring




Finish - Endura/Street Shoe Matte  
 Stain - Cordovan  
 Edge detail - Micro Bevel  
 Surface - Smooth  
 Thickness - ¾" solid  
 Widths - 2 ¼", 3", 4", 5"  
 Grade - Tight Knot

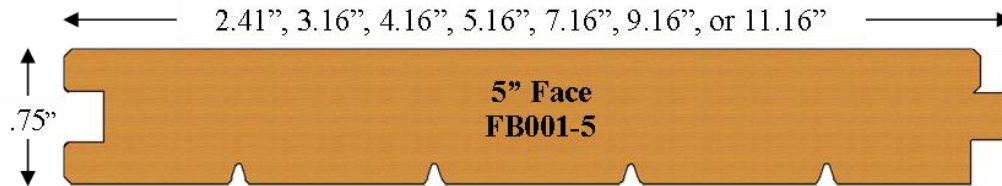

### Other Options Available. . . . .

Finish - Endura/Street Shoe Satin/Matte or sanded unfinished  
 Stain - Unlimited colors available  
 Edge detail - Micro Bevel or Square Edge  
 Surface - Smooth  
 Thickness - ¾" solid  
 Widths - 2-1/4", 3", 4", 5", 7", 9", 11" ([Click for pattern detail](#))  
 Grades - Rustic, Tight Knot, Select

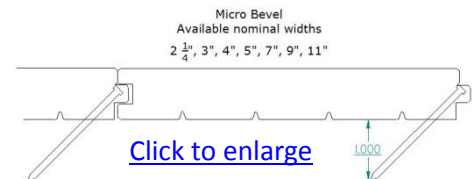

Before receiving delivery of flooring, be sure all masonry, stone, drywall is completed and climate controls operating for at least one week to normal living conditions. Rooms over 10' in width begin installation in center of room and use spline to reverse direction. Recommended 2" long approved flooring serrated nail or staple placed 6" to 8" apart. Nail and glue is best installation method. Leave ½" to ¾" expansion gap along all walls and hide gap with base and shoe.

[Click for full installation details](#)

[www.kwaterskibros.com](http://www.kwaterskibros.com)

*Nation's Largest Selection of Creative Wood Products*