



# Headwaters Siding Collection

## Weatheredge Log– SM009

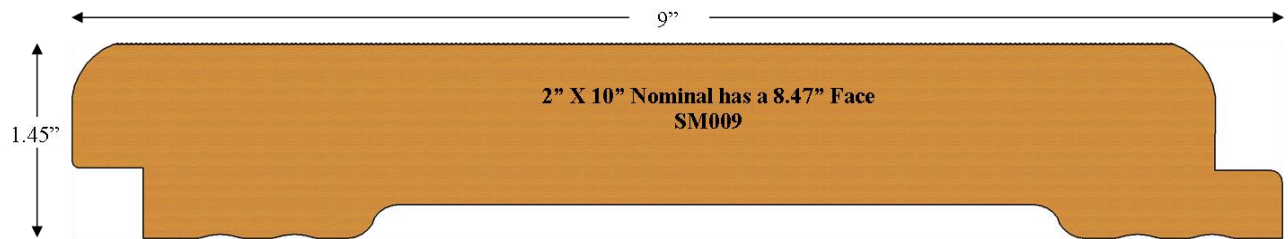

### Available Specifications

- Species - Alaskan Pine\*, White Pine, Cedar\*, Redwood\*
- Colors - Log & Siding, SRD, Semi-Transparent,  
Rubbol Solid, Custom colors also available
- Edge detail - Shiplap – Face Nailed
- Surface - Wirebrushed or Sanded Face
- Thickness - 2" Nominal
- Widths - 6", 8", 10", 12" Nominal ([Click for pattern details](#))
- Grades (specie dependent) - Tight Knot, Select, Clear Vertical Grain
- \* Non-resinous - no pitch bleed

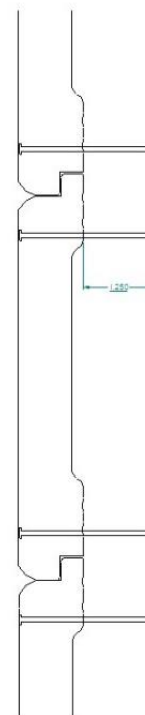

### Installation Guide

Recommended  $1\frac{1}{4}$ " penetration of stainless steel siding screw or nail into wood substrate (sheeting and wall studs) behind siding. Horizontal installation, nail into each wall stud. Use 3" trim screw or 10d stainless steel nail provided there is no foam board behind siding.

[Click to enlarge](#)

[www.kwaterskibros.com](http://www.kwaterskibros.com)

*Nation's Largest Selection of Creative Wood Products*